DOOR SCHEDULE

DOOR NO.	LOCATION	DOOR SIZE	DOOR TYPE	DOOR MATERIAL	FINISH	FRAME TYPE	FRAME MATERIAL	FRAME FINISH	HEAD DETAIL	JAMB DETAIL	SADDLE DETAIL	HARDWARE SET	FIRE RATING	REMARKS
300	PATIENT ROOM 3335	3'-9" x 7'-0"	A	WD	FF	EX	EX	PT	EX	EX	-	HS-2	-	CONTRACTOR TO VERIFY EXISTING SIZE.
301	TOILET ROOM 3335A	2'-6" x 7'-0"	A	WD	FF	EX	EX	PT	EX	EX	4/A200	HS-3	-	CONTRACTOR TO VERIFY EXISTING SIZE.
302	PATIENT ROOM 3334	3'-9" x 7'-0"	A	WD	FF	EX	EX	PT	EX	EX	-	HS-2	-	CONTRACTOR TO VERIFY EXISTING SIZE.
303	TOILET ROOM 3334A	2'-6" x 7'-0"	A	WD	FF	EX	EX	PT	EX	EX	4/A200	HS-3	-	CONTRACTOR TO VERIFY EXISTING SIZE.
304	PATIENT ROOM 3333	3'-9" x 7'-0"	A	WD	FF	EX	EX	PT	EX	EX	-	HS-2	-	CONTRACTOR TO VERIFY EXISTING SIZE.
305	TOILET ROOM 3333A	2'-6" x 7'-0"	A	WD	FF	EX	EX	PT	EX	EX	4/A200	HS-3	-	CONTRACTOR TO VERIFY EXISTING SIZE.
306	PATIENT ROOM 3331	3'-9" x 7'-0"	A	WD	FF	EX	EX	PT	EX	EX	-	HS-2	-	CONTRACTOR TO VERIFY EXISTING SIZE.
307	TOILET ROOM 3331A	2'-6" x 7'-0"	A	WD	FF	EX	EX	PT	EX	EX	4/A200	HS-3	-	CONTRACTOR TO VERIFY EXISTING SIZE.
308	PATIENT ROOM 3330	3'-9" x 7'-0"	A	WD	FF	EX	EX	PT	EX	EX	-	HS-2	-	CONTRACTOR TO VERIFY EXISTING SIZE.
308A	PATIENT ROOM 3330	3'-9" x 7'-0"	B	WD	FF	EX	EX	PT	EX	EX	-	HS-1	-	CONTRACTOR TO VERIFY EXISTING SIZE.
309	TOILET ROOM 3330A	2'-6" x 7'-0"	A	WD	FF	EX	EX	PT	EX	EX	4/A200	HS-3	-	CONTRACTOR TO VERIFY EXISTING SIZE.
310	PATIENT ROOM 3330	2'-6" x 7'-0"	C	WD	FF	EX	EX	PT	EX	EX	-	HS-2	-	CONTRACTOR TO VERIFY EXISTING SIZE.
310A	PATIENT ROOM 3330	2'-6" x 7'-0"	B	WD	FF	EX	EX	PT	EX	EX	-	HS-1	-	CONTRACTOR TO VERIFY EXISTING SIZE.
311	PATIENT ROOM 3329	2'-6" x 7'-0"	C	WD	FF	EX	EX	PT	EX	EX	-	HS-2	-	CONTRACTOR TO VERIFY EXISTING SIZE.
311A	PATIENT ROOM 3329	2'-6" x 7'-0"	B	WD	FF	EX	EX	PT	EX	EX	-	HS-1	-	CONTRACTOR TO VERIFY EXISTING SIZE.
312	PATIENT ROOM 3329	3'-9" x 7'-0"	A	WD	FF	EX	EX	PT	EX	EX	-	HS-2	-	CONTRACTOR TO VERIFY EXISTING SIZE.
312A	PATIENT ROOM 3329	3'-9" x 7'-0"	B	WD	FF	EX	EX	PT	EX	EX	-	HS-1	-	CONTRACTOR TO VERIFY EXISTING SIZE.
313	TOILET ROOM 3329A	2'-6" x 7'-0"	A	WD	FF	EX	EX	PT	EX	EX	4/A200	HS-3	-	CONTRACTOR TO VERIFY EXISTING SIZE.
314	PATIENT ROOM 3328	3'-9" x 7'-0"	A	WD	FF	EX	EX	PT	EX	EX	-	HS-2	-	CONTRACTOR TO VERIFY EXISTING SIZE.
314A	PATIENT ROOM 3328	3'-9" x 7'-0"	B	WD	FF	EX	EX	PT	EX	EX	-	HS-1	-	CONTRACTOR TO VERIFY EXISTING SIZE.
315	TOILET ROOM 3328A	2'-6" x 7'-0"	A	WD	FF	EX	EX	PT	EX	EX	4/A200	HS-3	-	CONTRACTOR TO VERIFY EXISTING SIZE.
316	PATIENT ROOM 3328	2'-6" x 7'-0"	C	WD	FF	EX	EX	PT	EX	EX	-	HS-2	-	CONTRACTOR TO VERIFY EXISTING SIZE.
316A	PATIENT ROOM 3328	2'-6" x 7'-0"	B	WD	FF	EX	EX	PT	EX	EX	-	HS-1	-	CONTRACTOR TO VERIFY EXISTING SIZE.
317	PATIENT ROOM 3124	2'-6" x 7'-0"	C	WD	FF	EX	EX	PT	EX	EX	-	HS-2	-	CONTRACTOR TO VERIFY EXISTING SIZE.
317A	PATIENT ROOM 3124	2'-6" x 7'-0"	B	WD	FF	EX	EX	PT	EX	EX	-	HS-1	-	CONTRACTOR TO VERIFY EXISTING SIZE.
318	TOILET ROOM 3124A	2'-6" x 7'-0"	A	WD	FF	EX	EX	PT	EX	EX	4/A200	HS-3	-	CONTRACTOR TO VERIFY EXISTING SIZE.
319	PATIENT ROOM 3124	3'-9" x 7'-0"	A	WD	FF	EX	EX	PT	EX	EX	-	HS-2	-	CONTRACTOR TO VERIFY EXISTING SIZE.
319A	PATIENT ROOM 3124	3'-9" x 7'-0"	B	WD	FF	EX	EX	PT	EX	EX	-	HS-1	-	CONTRACTOR TO VERIFY EXISTING SIZE.
320	PATIENT ROOM 3123	3'-9" x 7'-0"	A	WD	FF	EX	EX	PT	EX	EX	-	HS-2	-	CONTRACTOR TO VERIFY EXISTING SIZE.
320A	PATIENT ROOM 3123	3'-9" x 7'-0"	B	WD	FF	EX	EX	PT	EX	EX	-	HS-1	-	CONTRACTOR TO VERIFY EXISTING SIZE.
321	TOILET ROOM 3123A	2'-6" x 7'-0"	A	WD	FF	EX	EX	PT	EX	EX	4/A200	HS-3	-	CONTRACTOR TO VERIFY EXISTING SIZE.
322	PATIENT ROOM 3123	2'-6" x 7'-0"	C	WD	FF	EX	EX	PT	EX	EX	-	HS-2	-	CONTRACTOR TO VERIFY EXISTING SIZE.
322A	PATIENT ROOM 3123	2'-6" x 7'-0"	B	WD	FF	EX	EX	PT	EX	EX	-	HS-1	-	CONTRACTOR TO VERIFY EXISTING SIZE.
323	PATIENT ROOM 3122	2'-6" x 7'-0"	C	WD	FF	EX	EX	PT	EX	EX	-	HS-2	-	CONTRACTOR TO VERIFY EXISTING SIZE.
323A	PATIENT ROOM 3122	2'-6" x 7'-0"	B	WD	FF	EX	EX	PT	EX	EX	-	HS-1	-	CONTRACTOR TO VERIFY EXISTING SIZE.
324	TOILET ROOM 3122A	2'-6" x 7'-0"	A	WD	FF	EX	EX	PT	EX	EX	4/A200	HS-3	-	CONTRACTOR TO VERIFY EXISTING SIZE.
325	PATIENT ROOM 3122	3'-9" x 7'-0"	A	WD	FF	EX	EX	PT	EX	EX	-	HS-2	-	CONTRACTOR TO VERIFY EXISTING SIZE.
325A	PATIENT ROOM 3122	3'-9" x 7'-0"	B	WD	FF	EX	EX	PT	EX	EX	-	HS-1	-	CONTRACTOR TO VERIFY EXISTING SIZE.
326	PATIENT ROOM 3121	3'-9" x 7'-0"	A	WD	FF	EX	EX	PT	EX	EX	-	HS-2	-	CONTRACTOR TO VERIFY EXISTING SIZE.
327	TOILET ROOM 3121A	2'-6" x 7'-0"	A	WD	FF	EX	EX	PT	EX	EX	4/A200	HS-3	-	CONTRACTOR TO VERIFY EXISTING SIZE.
328	CORRIDOR 3000	2'-6" x 7'-0"	A	WD	FF	EX	EX	PT	EX	EX	-	HS-4	-	CONTRACTOR TO VERIFY EXISTING SIZE.
329	CORRIDOR 3000	3'-0" x 7'-0"	A	WD	FF	EX	EX	PT	EX	EX	-	HS-4	-	CONTRACTOR TO VERIFY EXISTING SIZE.
330	CORRIDOR 3000	3'-8" x 7'-0"	D	WD	FF	EX	EX	PT	EX	EX	-	HS-5	90 MIN	CONTRACTOR TO VERIFY EXISTING SIZE. PROVIDE MINERAL CORE DOOR.
331	CORRIDOR 3000	2'-6" x 7'-0"	A	WD	FF	EX	EX	PT	EX	EX	-	HS-4	-	CONTRACTOR TO VERIFY EXISTING SIZE.
332	CORRIDOR 3000	3'-0" x 7'-0"	A	WD	FF	EX	EX	PT	EX	EX	-	HS-4	-	CONTRACTOR TO VERIFY EXISTING SIZE.

ABBREVIATIONS: EX = EXISTING; FF = FACTORY FINISH; PT = PAINT; HM = HOLLOW METAL; WD = WOOD

DOOR HARDWARE SETS

HS-1:
- 3 HEAVY DUTY FULL MORTISE HINGES - MCKINNEY T4A378 SATIN CHROME US26D.
- SERIES PUSH/PULL - PASSAGE FUNCTION - SARGENT 115 SERIES -626 SATIN CHROME
- OVERHEAD CLOSER WITH HOLD OPEN - NORTON 9500 SERIES
- SILENCERS
- KICK PLATE- ROCKWOOD K1062-US32D

HS-2:
- 3 HEAVY DUTY FULL MORTISE HINGES - MCKINNEY T4A378 SATIN CHROME US26D.
- CYLINDRICAL LOCKSET - PASSAGE FUNCTION - DORMAKABA 9K SERIES 9K-3-7-P-15C-D-STK-626 SATIN CHROME
- OVERHEAD CLOSER WITH HOLD OPEN - NORTON 9500 SERIES
- SILENCERS
- KICK PLATE- ROCKWOOD K1062-US32D

HS-3:
- 3 HEAVY DUTY FULL MORTISE HINGES - MCKINNEY T4A3786 SATIN CHROME US26D.
- CYLINDRICAL LOCKSET - PRIVACY FUNCTION - DORMAKABA 9K SERIES 9K-3-0-L-15C-D-STK-626 SATIN CHROME
- OVERHEAD CLOSER WITH HOLD OPEN - NORTON 9500 SERIES
- SILENCERS

HS-4:
- 3 HEAVY DUTY FULL MORTISE HINGES - MCKINNEY T4A378 SATIN CHROME US26D.
- CYLINDRICAL LOCKSET - PASSAGE FUNCTION - DORMAKABA 9K SERIES 9K-3-7-P-15C-D-STK-626 SATIN CHROME
- DEAD BOLT- DORMAKABA D962-626
- OVERHEAD CLOSER - NORTON 9500 SERIES
- SILENCERS
- KICK PLATE- ROCKWOOD K1062-US32D

HS-5:
- 3 HEAVY DUTY FULL MORTISE HINGES - MCKINNEY T4A378 SATIN CHROME US26D.
- EXIT DEVICE - DORMAKABA 9000 SERIES 9500-626 SATIN CHROME
- OVERHEAD CLOSER - NORTON 9500 SERIES
- SILENCERS
- KICK PLATE- ROCKWOOD K1062-US32D
- GASKETING AS REQUIRED TO COMPLY WITH FIRE RATING
- EXISTING FIRE ALARM TIE IN TO BE MAINTAINED AND REINSTALLED ON NEW DOOR.

HARDWARE NOTES:

1. CONTRACTOR TO PREP DOORS AS REQUIRED FOR INSTALLATION OF ALL HARDWARE, INCLUDING BUT NOT LIMITED TO ADDITIONAL BORE HOLES, CROSS BORES, STRIKE PLATES, ETC.
2. CONTRACTOR TO REINFORCE DOORS AS REQUIRED FOR INSTALLATION OF HARDWARE.
3. ALL DOOR CLOSERS ARE TO BE SECURED WITH THROUGH-BOLT, SELF REAMING AND TAPPING SCREWS.
4. CONTRACTOR TO CONFIRM HARDWARE CONDITIONS AT EACH DOOR PRIOR TO PURCHASING HARDWARE SETS.

INTERIOR DOOR ELEVATIONS

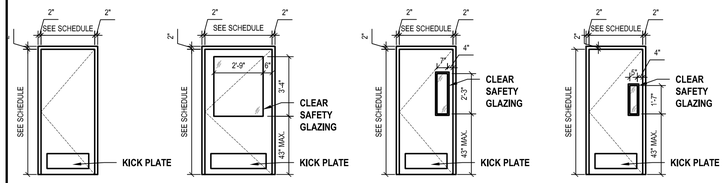

ELEV. 'A' ELEV. 'B' ELEV. 'C' ELEV. 'D'

GENERAL DOOR NOTES

1. DOORS IN FIRE RATED PARTITIONS ARE TO BE SELF CLOSING. WOOD DOORS IN RATED ASSEMBLIES TO BE MINERAL CORE.
2. ALL INTERIOR DOORS SHALL HAVE A 3/4" UNDERCUT. UNDERCUT SHALL BE MEASURED FROM THE TOP OF SADDLE. CONTRACTOR TO VERIFY IN FIELD AND COORDINATE WITH FINISHES.
3. THE CONTRACTOR SHALL BE REQUIRED TO REMOVE, MAINTAIN AND REINSTALL ALL EXISTING DOORS SCHEDULED TO REMAIN IN SCOPE DURING CONSTRUCTION IF REQUIRED.
4. PRIOR TO PRIMING AND PAINTING HOLLOW METAL DOORS AND FRAMES, CONTRACTOR SHALL SCRAPE, REPAIR AND SAND OFF ALL LOOSE PAINT CHIPS FOR A SMOOTH AND SOUND SURFACE. CONTRACTOR SHALL REMOVE, MAINTAIN AND REINSTALL HARDWARE TO ALLOW FOR A FIRST-CLASS FINISH.
5. CONTRACTOR TO PAINT ALL EXITING FRAMES TO REMAIN.
6. DOORS TYPE - VT INDUSTRIES HERITAGE COLLECTION WOOD VENEER IN WHITE BIRCH ROTARY CUT VENEER- BOOK MATCH, RUNNING MATCH
7. VISION PANEL GLAZING TYPES
   - 7.1. NON-RATED ASSEMBLIES : HEAT-TREATED FLOAT GLASS:ASTM C1048; TYPE I; QUALITY-Q3; CLASS I (CLEAR)
   - 7.2. RATED ASSEMBLES : LAMINATED FIRE RATED , HIGH IMPACT SAFETY-RATED CERAMIC GLASS, ULTRA-HD TECHNOLOGY, 5/8" THICKNESS MEETING CPSC 16CRF1201(CAT. I AND II) AND ANSI Z97.1, WITHSTANDS THERMAL SHOCK. 5 YEAR LIMITED WARRANTY. SURFACE GRADE - STANDARD.

H2M architects + engineers
538 Broad Hollow Road, 4th Floor East
Melville, NY 11747
631.756.8000 • www.h2m.com

CONSULTANTS:
Lizardos
Mechanical & Electrical Engineering
200 Old Country Road · Mineola · NY 11501
516.484.1020 · Fax 516.484.0926
www.leapc.com

MARK	DATE	DESCRIPTION
1	06-25-21	ISSUED FOR REVIEW
2	07-29-21	ISSUED FOR BID
3	08-12-21	ADDENDA 1

"ALTERATION OF THIS DOCUMENT EXCEPT BY A LICENSED PROFESSIONAL IS ILLEGAL"

DESIGNED BY:	DRAWN BY:	CHECKED BY:	REVIEWED BY:
MEF	MEF		

PROJECT No.:	DATE:	SCALE:
NUMC2102	SEPT. 2021	AS SHOWN

CLIENT
NASSAU UNIVERSITY MEDICAL CENTER

2201 HEMPSTEAD TURNPIKE
EAST MEADOW NY 11554

3RD FLOOR MATERNITY MODERNIZATION

CONTRACT
CONTRACT G
GENERAL CONSTRUCTION

STATUS
BID SET

SHEET TITLE
DOOR SCHEDULE, INTERIOR DOOR ELEVATIONS, DOOR HARDWARE SETS & NOTES

DRAWING No.
A 300.00

X:\NUMC (Nuhealth) C19032\NUMC2102_Maternity Modernization\02 BIM-CAD\Cons docs\arch\A300.00 Door Schedule.dwg Last Modified: Sep 01, 2021 - 3:38pm By mfetterer Plotted on: Sep 01, 2021 - 3:38pm